




HUNTING MUD MOTORS

Hunting has a full fleet of mud motors which can be used in both straight hole and directional applications.

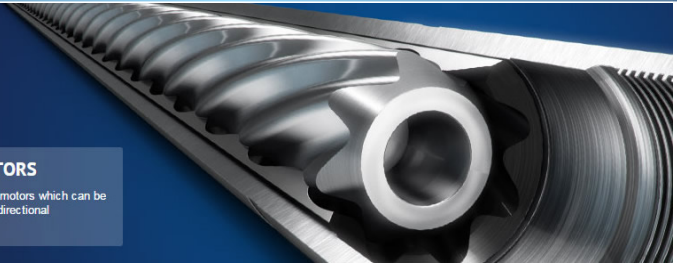

Part#	Size	Lobe	Stag- es	Motor Speed
168 5-6 4.0 (16.97)	1.68"	5/6	4	16.97
168 5-6 4.4 (11.10)	1.68"	5/6	4.4	11.1
212 5-6 2.5 (6.67)	2.12"	5/6	2.5	6.67
287 7-8 3.3 (3.37)	2.87"	7/8	3.3	3.37
350 7-8 4.3 (1.85)	3.5"	7/8	4.3	1.85
375 4-5 3.5 (1.55)	3.75"	4/5	3.5	1.55
375 5-6 4.2 (1.56)	3.75"	5/6	4.2	1.56
375 7-8 10.1 (1.95)	3.75"	7/8	10.1	1.95
500 3-4 11.0 (2.02)	5"	3/4	11	2.02
500 3-4 14.0 (2.26)	5"	3/4	14	2.26
500 4-5 6.0 (1.02)	5"	4/5	6	1.02
500 5-6 8.3 (1.00)	5"	5/6	8.3	1
500 6-7 7.0 (0.82)	5"	6/7	7	0.82
500 6-7 8.0 (0.8 1)	5"	6/7	8	0.81
500 7-8 2.6 (0.26)	5"	7/8	2.6	0.26
500 7-8 3.8 (0.52)	5"	7/8	3.8	0.52
500 7-8 4.5 (0.46)	5"	7/8	4.5	0.46
500 9-10 2.1 (0.17)	5"	9/10	2.1	0.17
650 2-3 7.0 (0.88)	6"	2/3	7	0.88
650 2-3 7.8 (1.00)	6"	2/3	7.8	1
650 2-3 8.0 (0.88)	6.5"	2/3	8	0.88
650 2-3 8.4 (1.48)	6.5"	2/3	8.4	1.48
650 6-7 2.7 (0.22)	6.5"	6/7	2.7	0.22
650 7-8 2.9 (0.17)	6.5"	7/8	2.9	0.17
650 7-8 3.0 (0.20)	6.5"	7/8	3	0.2
650 7-8 3.3 (0.16)	6.5"	7/8	3.3	0.16
650 7-8 3.5 (0.21)	6.5"	7/8	3.5	0.21

Continued > > >





Mud Motors

Part#	Size	Lobe	Stages	Motor Speed
650 7-8 3.8 (0.16)	6.5"	7/8	3.8	0.21
650 7-8 4.8 (0.33)	6.5"	7/8	4.8	0.33
650 7-8 6.7 (0.29)	6.5"	7/8	6.7	0.29
650 9-10 3.5 (0.15)	6.5"	9/10	3.5	0.15
675 4-5 7.0 (0.50)	6.75"	4/5	7	0.5
675 6-7 5.0 (0.29)	6.75"	6/7	5	0.29
675 7-8 2.1 (0.13)	6.75"	7/8	2.1	0.13
675 7-8 3.0 (0.28)	6.75"	7/8	3	0.28
675 7-8 3.5 (0.15)	6.75"	7/8	3.5	0.15
675 7-8 5.0 (0.29)	6.75"	7/8	5	0.29
675 7-8 5.7 (0.24)	6.75"	7/8	5.7	0.24
675 7-8 6.0 (0.26)	6.75"	7/8	6	0.26
675 9-10 4.0 (0.27)	6.75"	9/10	4	0.27
700 4-5 7.0 (0.50)	7"	4/5	7	0.5
700 7-8 3.5 (0.15)	7"	7/8	3.5	0.15
700 7-8 5.0 (0.29)	7"	7/8	5	0.29
700 7-8 5.7 (0.24)	7"	7/8	5.7	0.24
800 4-5 6.0 (0.25)	8"	4/5	6	0.25
800 7-8 2.5 (0.07)	8"	7/8	2.5	0.07
800 7-8 3.0 (0.17)	8"	7/8	3	0.17
800 7-8 3.4 (0.09)	8"	7/8	3.4	0.09
800 7-8 4.0 (0.17)	8"	7/8	4	0.17
800 9-10 3.0 (0.11)	8"	9/10	3	0.11
962 5-6 4.0 (0.11)	9.62"	5/6	4	0.11
962 5-6 5.0 (0.14)	9.62"	5/6	5	0.14
962 7-8 3.9 (0.07)	9.62"	7/8	3.9	0.07
962 9-10 4.0 (0.09)	9.62"	9/10	4	9.62